




MULTI-POINT DRESSING TOOLS AVAILABLE SHAPES

TOOL NO.




Shape 10 (1A)






Shape 10 (1A-C)



Shape 11 (2A-D)



Shank Diameter Mounting Length

7/16 x 15/16"

Centerless, Cylindrical and Surface Grin-ders. For grinding wheels 20 x 3 and lar-ger. Straight traverse truing.

7/16 x 15/16"

Centerless, Cylindrical and Surface Grin-ders with angular truing post where tra-verse stroke is limited. For grinding wheels 20 x 3 and larger

7/16 x 15/16

Use on 20 x 3 and larger cylindrical, centerless and surface grinding wheels. Straight traverse truing.


7/16 x 1-1/4"

Centerless, Cylindrical and Surface Grin-ders. For grinding wheels 12 x over 1 to 20 x 2112. Straight traverse truing.

7 /16 x 3/4"

Centerless, Cylindrical and Surface Grin-ders with angular truing post. For grind-ing wheels 12 x over 1 to 20 x 21/2.

TOOL NO.	Shank Diameter Mounting Length	
Shape 12 (3A-F)	7/16 × 1-1/4"	Centerless, Cylindrical and Surface Grin-ders with angular truing post. For grind-ing wheels 12 \times over 1 to 20 \times $2^{1/2}.$ Straight traverse truing.
Shape 12 (3A-G)	7/16 x 1-1/4"	Use on $12 \times 1^{1/4}$ to $20 \times 2^{1/2}$ " cylindrical, centerless, or surface grinding wheels 46 thru 220 grit. Straight traverse truing.
Shape 12 (3A-H)	7/16 × 1-1/4"	Centerless, Cylindrical and Surface Grin-ders with angular truing post. For grind-ing wheels 20 \times 3 and larger. Straight traverse truing.
Shape 13 (1B-E)	7/16×3/4′′	Use on 20 × over 2½" thickness & larger cylindrical centerless or surface grinding wheels, 46 grit thru 180. Straight tra-verse truing.
THE STATE OF THE S	7/16×3/4''	Use on 20 \times over $2^{1/2}$ " thickness & larger cylindrical centerless or surface grinding wheels, 46 grit thru 180. Straight tra-verse truing,




Shape 14 (2B-A)



7/16 × 15/16"


Centerless, Cylindrical and Surface Grin-ders with angular truing post. For grind-ing wheels 20 × 3 and larger. Straight traverse truing.



Shape 14 (2B-B)

7/16 × 15/16

Use on 20 × over 2½" thickness & larger cylindrical centerless or surface grinding wheels. 46 grit thru 180. Straight tra-verse truing.



Shape 14 (2B-C)

7/16 x 15/16"

Use on 20 $\,\times\,$ over $2^{l/2}$ ' thickness & larger cylindrical centerless or surface grinding wheels, 46 grit thru 180. Straight tra-verse truing.



Shape 15 (1E-F)

7/16 × 1-1/4"

Cylindricai Grinders 45 angular wheel slide. Also step and right angle shoulder


dressing on Centerless and Cylindrical Grinders. Wheels to 20 x 21/2.



Shape 15 (1E-G)

7/16 x 1-1/4"

Cylindrical Grinders 45 angular wheel slide and truing post. Also for step and truing post. Also for step and right angle shoulder dressing on Centerless and Cyl-indrical Grinders. For grinding wheels up to $20 \times 2^{1}i_{2}$.

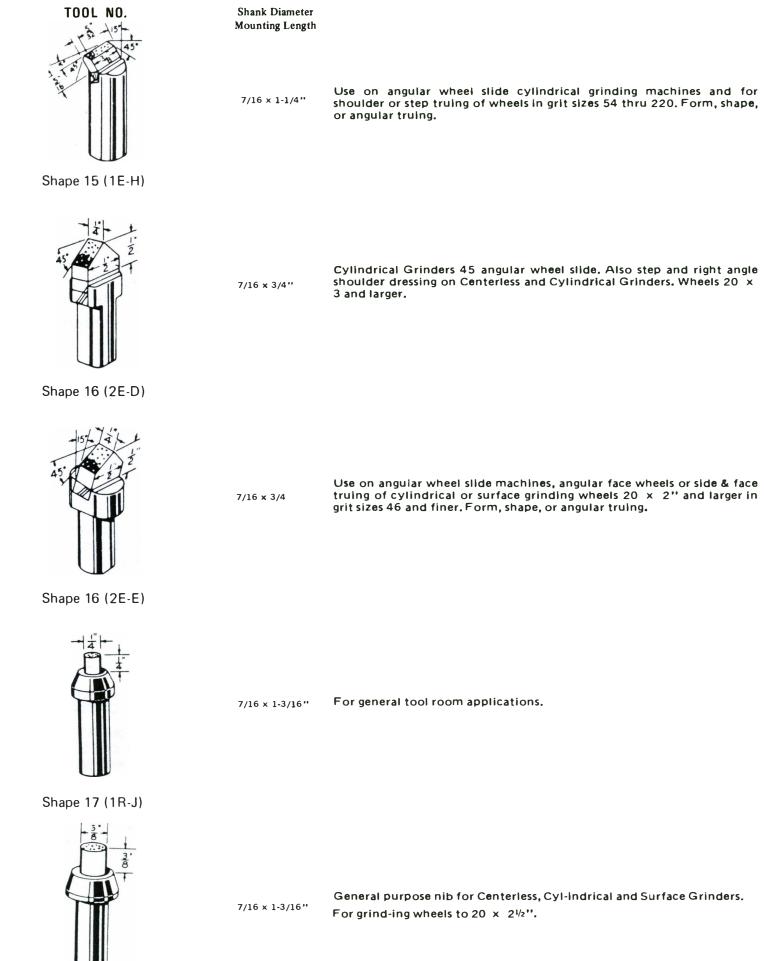

Shape 17 (2R-K)

Call Rapp Industrial for your discounted pricing 724-789-7853 - 888-789-7277. Email us - sales@rappindustrialsales.com