The logo features a red sine wave graphic that loops around the text "SINE-POWER".

SINE-POWER



**HIGH PERFORMANCE HSS ROUGHER
for TITANIUM, TITANIUM ALLOYS AND
STAINLESS STEELS**



Leading Through Innovation

Call Rapp Industrial for your discounted pricing 724-789-7853 - 888-789-7277. Email us - sales@rappindustrialsales.com

SINE-POWER for Titanium and Titanium alloys is specifically designed for Aerospace and Power-Generation applications where efficient roughing of difficult to machine materials is essential.

Moreover, the engineered geometry allows exceptional metal removal rates at increased feeds and results in a better surface finish than a standard rougher.

APPLICATIONS:
TITANIUM
TITANIUM ALLOYS
STAINLESS STEELS

MATERIAL:
HSS Co8%

ENGINEERED FLUTE GEOMETRY

- Optimal chip formation and evacuation
- Reduces friction and heat generation

CORNER PROTECTION:

- Standard chamfer
- Corner radius on request

VARIABLE FACE PROFILE & SINUSOIDAL CUTTING EDGES

- Reduces vibrations and chatter
- Allows large depths of cut in slotting and profiling operations

CENTER CUTTING

- 4&6 flute
- Higher stability
- Axial machining





**Excellent
chip formation**

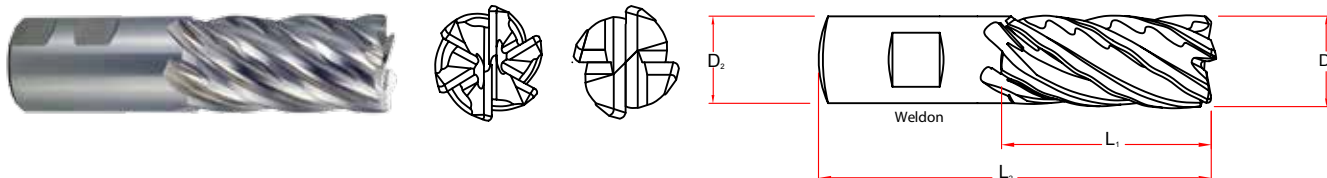
SINE-POWER	
Material	HSS Co8%
Dimension	ø2"(R.125") x ø2" x 4" x 7-3/4"
No. of Flute	6
Coating	Uncoated

CUTTING CONDITIONS		
Milling Method	Slotting	Profiling
Material	6Al4V Titanium	
Coolant	Wet Cut	
RPM	100 rev/min	100 rev/min
Feed	2 IPM	3.15 ~ 4.2 IPM
Axial Depth	1-1/2 inch	1-1/2 inch
Radial Depth	2 inch	0.1 ~ 0.2 inch
Feed/Tooth	.0018 inch/tooth	.0053 ~ .007 inch/tooth

The above cutting conditions achieved 5 hours machining

**THE SINE-POWER SPECIFIC GEOMETRY DESIGN HELPS
OUR CUSTOMERS TO INCREASE THEIR PRODUCTIVITY
BY 15% IN TITANIUM MACHINING.**

HSS Co8, 4&6 FLUTE, FLAT SHANK

HSS
Co8

4&6

FLAT

Bright

Cutting Dia. Tolerance

.0000 / + .0030 inch

Shank Dia. Tolerance


- .0001/ - .0005 inch

INCH SERIES

Unit: Inch

EDP No.	Cutting Diameter D ₁	Shank Diameter D ₂	Length of Cut L ₁	Overall Length L ₂	Chamfer	No. of Flute
E2F64048	3/4	3/4	1 5/8	3 7/8	.030	4
E2F64901	3/4	3/4	2 1/4	4 1/2	.030	4
E2F64902	3/4	3/4	3	5 1/4	.030	4
E2F64064	1	1	2	4 1/2	.030	4
E2F64903	1	1	2	4 1/2	.030	6
E2F64904	1	1	3	5 1/2	.030	4
E2F64905	1	1	3	5 1/2	.030	6
E2F64906	1	1	4	6 1/2	.030	4
E2F64907	1	1	4	6 1/2	.030	6
E2F64116	1 1/4	1 1/4	2	4 1/2	.040	4
E2F64908	1 1/4	1 1/4	2	4 1/2	.040	6
E2F64909	1 1/4	1 1/4	3	5 1/2	.040	4
E2F64910	1 1/4	1 1/4	3	5 1/2	.040	6
E2F64911	1 1/4	1 1/4	4	6 1/2	.040	4
E2F64912	1 1/4	1 1/4	4	6 1/2	.040	6
E2F64132	1 1/2	1 1/4	2	4 1/2	.040	6
E2F64913	1 1/2	1 1/4	3	5 1/2	.040	6
E2F64914	1 1/2	1 1/4	4	6 1/2	.040	6
E2F64915	1 1/2	1 1/4	6	8 1/2	.040	6
E2F64200	2	2	2	5 3/4	.040	6
E2F64916	2	2	3	6 3/4	.040	6
E2F64917	2	2	4	7 3/4	.040	6
E2F64918	2	2	6	9 3/4	.040	6
E2F64919	2	2	8	11 3/4	.040	6

Corner radius available on request

SPEED AND FEED RECOMMENDATIONS					Diameter (inch)					
ISO HARDNESS (BHN)	Work Materials	Type of cut		Parameters	3/4	1	1 1/4	1 1/2	2	
M < 250	Stainless Steel - Free Machining 303, 416, 420F, 430F 440F	Profiling 	2	0.5	SFM (Vc)	110 (88-132)				
					RPM	560	420	336	280	210
					Fz	0.0020	0.0030	0.0040	0.0050	0.0060
					Feed (IPM)	7	8	8	8	8
		Slotting 	1	1	SFM (Vc)	95 (76-114)				
					RPM	484	363	290	242	181
					Fz	0.0025	0.0035	0.0045	0.0055	0.0065
					Feed (IPM)	7	8	8	8	7
M < 275	Stainless Steel - Difficult 304, 304L,316, 316L	Profiling 	1.5	0.5	SFM (Vc)	100 (80-120)				
					RPM	509	382	306	255	191
					Fz	0.0020	0.0030	0.0040	0.0050	0.0060
					Feed (IPM)	6	7	7	8	7
		Slotting 	1	1	SFM (Vc)	80 (64-96)				
					RPM	407	306	244	204	153
					Fz	0.0025	0.0035	0.0045	0.0055	0.0065
					Feed (IPM)	6	6	7	7	6
M < 325	Stainless Steel PH 13-8 PH,15-5PH,17-4 PH, Custom 450	Profiling 	1.5	0.5	SFM (Vc)	85 (68-102)				
					RPM	433	325	260	216	162
					Fz	0.0020	0.0030	0.0040	0.0050	0.0060
					Feed (IPM)	5	6	6	6	6
		Slotting 	1	1	SFM (Vc)	75 (60-90)				
					RPM	382	287	229	191	143
					Fz	0.0025	0.0035	0.0045	0.0055	0.0065
					Feed (IPM)	6	6	6	6	6
S < 350	Titanium Base Alloy Pure Ttanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	Profiling 	2	0.5	SFM (Vc)	75 (60-90)				
					RPM	382	287	229	191	143
					Fz	0.0017	0.0025	0.0030	0.0035	0.0045
					Feed (IPM)	4	4	4	4	4
		Slotting 	1	1	SFM (Vc)	65 (52-78)				
					RPM	331	248	199	166	124
					Fz	0.0017	0.0025	0.0030	0.0035	0.0045
					Feed (IPM)	3	4	4	3	3
S < 450	Titanium Base Alloy - Difficult Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	Profiling 	1.5	0.5	SFM (Vc)	60 (48-72)				
					RPM	306	229	183	153	115
					Fz	0.0017	0.0025	0.0030	0.0035	0.0045
					Feed (IPM)	3	3	3	3	3
		Slotting 	1	1	SFM (Vc)	40 (32-48)				
					RPM	204	153	122	102	76
					Fz	0.0017	0.0025	0.0030	0.0035	0.0045
					Feed (IPM)	2	2	2	2	2

* Maximum recommended depth shown

* Reduce speed & feed for material harder than listed

* Above recommendations are based on ideal conditions; for smaller taper machining centers or less rigid conditions please adjust parameters accordingly on diameters greater than 3/4"

HIGH QUALITY PRODUCTS AND ON TIME DELIVERY FOR WORLD-WIDE CUSTOMERS

Since 1982, our commitment to quality, reliability and striving for constant innovation has allowed us to expand our market share and our partners' global network. As one of the main leading tool manufacturers, we are dedicated in offering a unique customer experience by delivering high quality cutting tool solutions around the world. In order to be responsive and to offer local solutions, YG-1 has established a global network over 75 countries and has set up international logistic centers. This is our pledge to provide the best service in order to satisfy our customers' needs at all time.



 **YG-1 TOOL (U.S.A)**
PHONE : +1 800 765 8665
FAX : +1 866 941 8665
E-mail : heatherlee@yg1usa.com

 **REGAL CUTTING TOOLS INC. (U.S.A)**
PHONE : +1 815 389 3461
FAX : +1 815 389 9858
E-mail : customerservice@regalcuttingtools.com

 **YG-1 LATIN AMERICA (BRAZIL)**
PHONE : +55 11 4496 2170
FAX : +55 11 4591 1438
E-mail : walter.campos@yg1.com.br

 **YG-1 CANADA INC. (CANADA)**
PHONE : +1 905 335 2500
FAX : +1 905 335 4003
E-mail : reception@yg1.ca

 **MINICUT INTERNATIONAL INC. (CANADA)**
PHONE : +1 514-352-6464
FAX : +1 514-352-6644
E-mail : international@minicut.com

 **YG-1 TOOLS MEXICO SA DE CV (MEXICO)**
PHONE : +52 55 5576 8798
FAX : +52 55 5576 8790
E-mail : khmin@yg1.kr

 **YG CUTTING TOOL CORP. PVT. LTD. (INDIA)**
PHONE : +91 80 4354 3600
FAX : +91 80 4354 3613
E-mail : marketing@yg1india.com

 **YG-1 INDUSTRIES INDIA PVT.LTD. (INDIA)**
PHONE : +91 22 2580 6241
FAX : +91 22 2580 3576
E-mail : thanesales@yg1india.com

 **YG-1 HONG KONG LTD. (HONG KONG)**
PHONE : +852 2439 9018
FAX : +852 2439 9020
E-mail : enquiry@yghk.com.hk

 **NEW CENTURY TOOL CO., LTD. (CHINA)**
PHONE : +86 532 8676 9779
FAX : +86 532 8676 9105
E-mail : qnct@qnct.cn

 **QINGDAO YG-1 TOOL CO.,LTD. (CHINA)**
PHONE : +86 532 8519 7366
FAX : +86 532 8519 7959
E-mail : qyg1@qyg1.com

 **YG-1 SHANGHAI CO.,LTD. (CHINA)**
PHONE : +86 21 6383 1661
FAX : +86 21 6383 1771
E-mail : enquiry@yg-1china.com

 **YG-1 JAPAN CO., LTD. (JAPAN)**
PHONE : +81 6 6305 9897
FAX : +81 6 6305 9898
E-mail : toyokazu-kitaoka@yg1.jp

 **NEW SANKYO CUTTING TOOLS (JAPAN)**
PHONE : +81 87 876 1155
FAX : +81 87 876 3461
E-mail : hjsin@newsankyo-tool.co.jp

 **PT.YGI TOOLS (INDONESIA)**
PHONE : +62 21 4585 8141
FAX : +62 21 4587 7412
E-mail : ygtools@gmail.com

 **YG-1 MALAYSIA SDN. BHD. (MALAYSIA)**
PHONE : +603 5569 4834
FAX : +603 5569 4814
E-mail : enquiries@yg1.com.my

 **YG-1 TOOLS ASIA PTE. LTD. (SINGAPORE)**
PHONE : +65 6842 0468
FAX : +65 6842 0482
E-mail : ctang@yg1.kr

 **YG-1 THAILAND CO., LTD. (THAILAND)**
PHONE : +662 732 0186~7
FAX : +662 732 0188
E-mail : info@yg1.co.th

 **YG-1 VIETNAM CO., LTD. (VIETNAM)**
PHONE : +84 4 3795 7233
FAX : +84 4 3795 7232
E-mail : yg1vietnam@yg1.co.kr

 **YG-1 AUSTRALIA PTY. LTD. (AUSTRALIA)**
PHONE : +61 3 9558 0177
FAX : +61 3 9558 2778
E-mail : ygone@yg1.kr

 **YG-1 EUROPE (FRANCE)**
PHONE : +33 172 84 4070
FAX : +33 172 84 4086
E-mail : yg1@yg1.eu

 **YG-1 DEUTSCHLAND GmbH (GERMANY)**
PHONE : +49 6173 9667 0
FAX : +49 6173 9667 29
E-mail : info@yg-1.de

 **YG-1 POLAND Sp. z o.o. (POLAND)**
PHONE : +48 22 622 2586
FAX : +48 22 622 2587
E-mail : info@yg1.pl

 **YG-1 CO., TRADING SRL (ROMANIA)**
PHONE : +40 21 25 25 501~3
FAX : +40 21 25 25 506
E-mail : kimromko@yg1.kr

 **TEKNO TAKIM San. Tic. AS. (TURKEY)**
PHONE : +90 212 671 1590
FAX : +90 212 671 1595
E-mail : info@teknokim.com

 **CLARKSON OSBORN INTERNATIONAL LTD. (U.K)**
PHONE : +44 114 276 8622
FAX : +44 114 275 4012
E-mail : sales@clarkson-osborn.co.uk

 **EUROPA TOOLS CO., LTD. (U.K)**
PHONE : +44 24 7664 1282
FAX : +44 24 7664 1390
E-mail : sales@europatool.co.uk

YG-1 TOOL USA

730 Corporate Woods Parkway Vernon Hills IL 60061 USA

Tel: 800-765-8665 Fax: 866-941-8665

Technical Assistance: 888-868-5988 www.yg1usa.com

YG-1 HEAD OFFICE

211, Sewolcheon-ro, Bupyeong-gu, Incheon, Korea

Tel: +82-32-526-0909 Fax: +82-32-526-4373

www.yg1.kr - Email: yg1@yg1.kr